



# Installation < Fixscreen® 100<sup>EVO</sup>



There are various installation possibilities:

→ towards disassembly fabric roller barrel with fabric and motor.


**Installation method 1**

<b>Square design</b>	<b>Softline design</b>
	
<b>Surface-mounted</b> Outside, in front of the window	<b>Surface-mounted</b> Outside, in front of the window

**Installation method 1+**

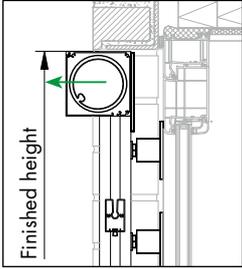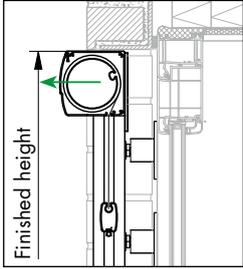
<b>Square design</b>	<b>Softline design</b>
	
<b>Surface-mounted</b> placed at a distance relative to the structure	<b>Surface-mounted</b> placed at a distance relative to the structure

**Installation method 4**  
*Interior to be finished by a carpenter*

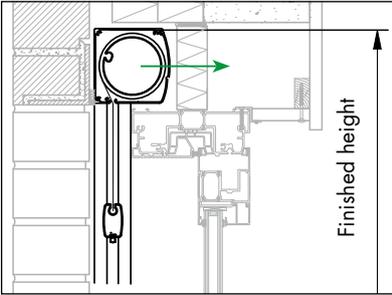



**Hidden installation, reversed box,**  
on top of the window with box, **without front cover**

**Installation method 5**  
*Interior to be finished by a carpenter*


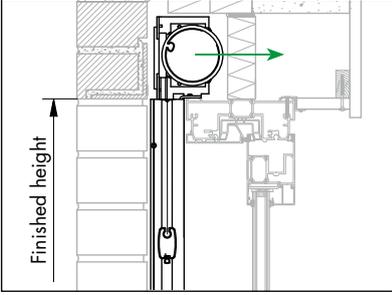


**Hidden installation, with brackets, without box**



**Installation method 6**
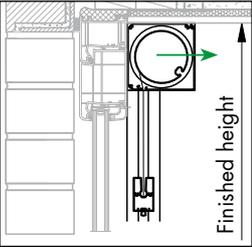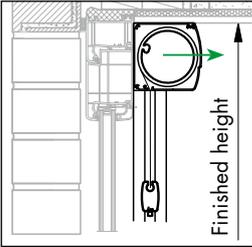
<b>Square design</b>	<b>Softline design</b>
	
<b>Surface-mounted</b> Inside, in front of the window	<b>Surface-mounted</b> Inside, in front of the window


**Installation method 7A**
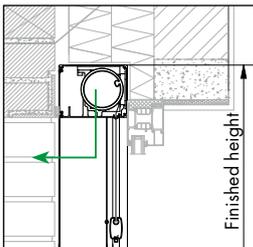
<b>Standard</b>	
	
<b>Surface-mounted</b> with box	<b>Surface-mounted</b> with box, <b>Stucco</b>

**Installation method 7B**  
With reversed box and side channels

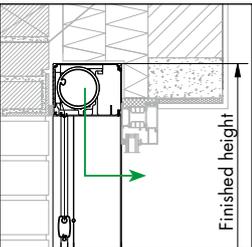	
<b>Surface-mounted</b> with box	<b>Surface-mounted</b> with box, <b>Stucco</b>

**Installation method 9**

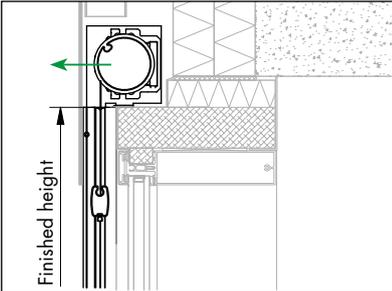


**Hidden installation**  
with brackets, **without box**


Side channels

	S	S+	G	K	D	
FIXSCREEN® 100 <sup>EVO</sup>	IM1	STD	x	x		
	IM1+	STD				
	IM4		STD	x		
	IM5	STD		x	x	
	IM6	STD		x	x	
	IM7A	x		x	x	STD
	IM7B	x		x	x	STD
	IM9	STD		x	x	

\* To be able to disassemble the fabric roller barrel from beneath in case of IM7, the client must foresee something underneath the headbox that can be dismantled when choosing the narrow side channels S x G. The dimensions of this dismantlable part are determined as follows: the minimum depth equals the depth of the box less the depth of the narrow side channel and with a minimal height of 680 mm

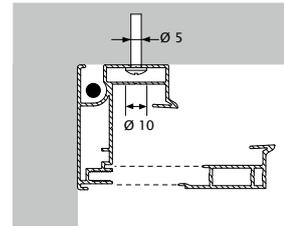


Rear mounting of the side channel Fixscreen® 100<sup>EVO</sup>

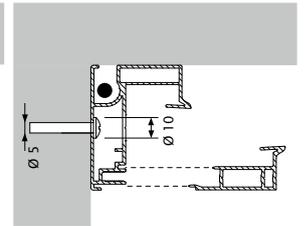


Side mounting of the side channel Fixscreen® 100<sup>EVO</sup>


Open side channel (S)




Open side channel (S+)




Closed side channel (G)



Coupling side channel (K)

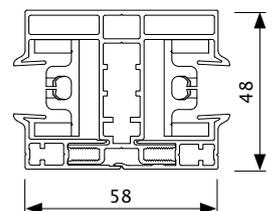


Deep side channel (D)

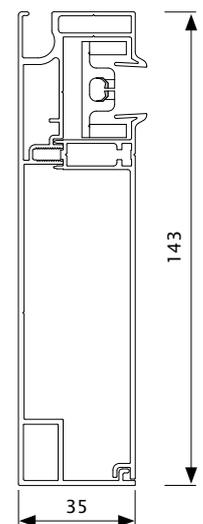

Box extension

Is possible in installation methods 1, 6 & 7 (Fixscreen 100<sup>EVO</sup>, Fixscreen 100<sup>EVO</sup> Slim & Fixscreen 150<sup>EVO</sup>). The box profiles extend all the way to the consoles. This extension can be made to the left and/or to the right with 500 mm.

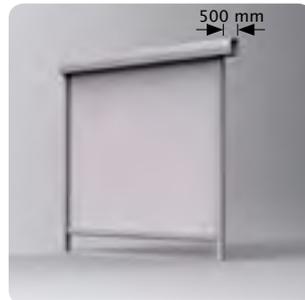

Several methods of extension are then made possible. 2 box extensions can be positioned next to another, making an angle.

